


## Diesel Generating Sets

**50  
Hz**

**Model: ETMG1375**

INDUSTRIAL RANGE

Powered by MITSUBISHI

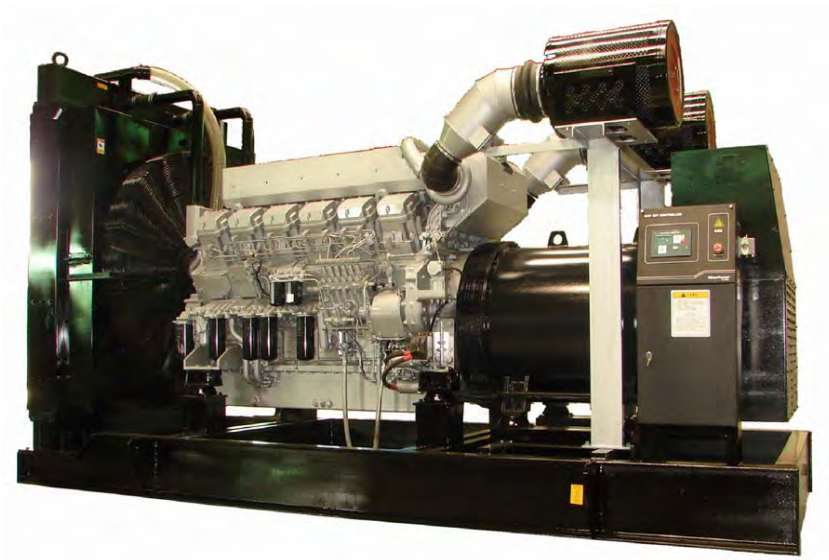

## Generating Rates

POWER RATING		PRIME	STANDBY
POWER	kVA	1250	1375
	kW	1000	1100
Rated Speed	r.p.m	1500	
Standard Voltage	V	400	
Available Voltages	V	400/230 - 230/132 - 230 V	
Rated at power factor	Cos Phi	0.8	

**Ambient conditions of reference:** 1000 mbar, 25°C, 30% relative humidity. Power according to ISO 3046 normative.

**P.R.P. Prime Power - ISO 8528 :** prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during a 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

**Standby Power (ISO 3046 Fuel Stop power):** power available for use at variable loads for limited annual time (500h), within the following limits of maximum operating time: 100% load 25h per year – 90% load 200h per year. No overload available. Applicable in case of failure of the main in areas of reliable electrical network.

**Diesel Generating Sets**



**Model: ETMG1375**

INDUSTRIAL RANGE

Powered by MITSUBISHI



**Engine Specifications 1500 r.p.m.**

ENGINE		PRP	STANDBY		
Rated Output	kW	1080	1190		
Manufacturer		MITSUBISHI			
Model		S12R-PTA			
No. of Cylinders and Build		4 Cycle; 12V Cylinder Diesel			
Aspiration and Cooling		Turbo-Charged, After Cooler			
Bore/Stroke	mm	170X180			
Compress the ratio		14.0:1			
Cooling system		Water-cooled			
Engine Speed/Frequency	rpm/Hz	1500/50HZ			
Coolant Capacity	L	335			
Starting System		Electric 24 volt DC			
Displacement	L	49.03			
Lubricant system Capacity	L	180			
Battery Volatge / Capacity		24VDC			
Governing Type	Type	Electrical			
Air Filter	Type	Dry			
Fuel Consumption	Load	100%			
	g/KWh	205.0			

**ENGINE**--Industrial 4 stroke cooled diesel engine complete with air,fuel and oil filters,electric starting and charging equipment,engine protection against low water level.

**COOLING**--Radiator and colling fan complete with protection guards,designed to cool engine at specified output in air temperatures upto 45 °C ,radiators suitable for higher temperatures are available.Low water level protection fitted as standard.

**ELECTRICAL SYSTEM**--24V upto.Axial type starter motor,battery charging alternator,high capacity lead acid battery,and battery tray mounted on the generator base frame,and heavy duty interconnecting cable with terminations.

**EXHAUST SYSTEM**--Heavy duty industrial exhaust silencer with flexible piping.

## Diesel Generating Sets

**50  
Hz**

**Model: ETMG1375**

INDUSTRIAL RANGE

Powered by MITSUBISHI



## Alternator Technical Specifications

ALTERNATOR BRAND		LEROY SOMER	STAMFORD
Model		LSA50.2M6	LVI634G
Exciter System		Self-excited, brushless	
Poles	Num	4	
Cooling Fan		Cast alloy aluminum	
Bearing		Single, double shielded	
Windings		100% copper	
Connection Type		Reconnectable	
Insulation Type	Class	Class H	
Pitch		2/3	
Amortisseur Winding		Full	
Voltage Regulator		A.V.R. (Electronic)	
Steady Voltage Precision		± 1%	
Underspeed Protection		Standard	
Overexcitation Protection		IP23	
TIF (1960 Weightings)		<50	

**ALTERNATOR**--Brushless, self exciting, self regulation, screen protected, drip proof rated in accordance with IEC60034. Voltage regulation maintained within ±0.5% from no load to full load. between 0.8 lagging and unity. All standard voltages available.

## Diesel Generating Sets

50  
Hz

**Model: ETMG1375**  
INDUSTRIAL RANGE  
Powered by MITSUBISHI

### Control Panel Technical Specifications

#### Control Panel- SMARTGEN 6110/6120

The base mounted control panel in a vibration isolated sheet steel enclosure. The control panel is equipped as follows:

- a) Instruments: Analogue Voltmeter, Hours Run Meter, Water pressure Meter.
- b) Controls: Emergency Stop Pushbutton, Voltmeter Phase Selector Switch.
- c) Control module: Standard collocation is smartgen Auto start with AMF.

**Smartgen®**

#### Main Features:

- Δ Automatic mains failure
- Δ Engine control, Generator protection
- Δ Built in alarms and warnings
- Δ Remote Start operation available
- Δ Fuel pump control
- Δ Mains simulation
- Δ Block heater control
- Δ Field adjustable parameters
- Δ Free MS-Windows Remote monitoring
- Δ LED displays
- Δ Configurable analogue inputs
- Δ I/O expansion capability



#### Protection Circuits

- WARNING
- Battery charge failure
  - Low battery voltage
- SHUT DOWNS
- Fail to start
  - Emergency stop
  - Low oil pressure
  - High engine temperature
  - Over /Under speed
  - Under/over generator frequency
  - Failed to reach loading voltage
  - Electrical trip
  - Generator over current

#### Instruments

- ENGINE
- Engine speed
  - Oil pressure
  - Coolant temperature
  - Run time
  - Battery volts
- TOR
- Voltage (L-N)
  - Current (L1-L2-L3)
  - Frequency
- Mains
- Voltage (L-L, L-N)

## Diesel Generating Sets



Model: **ETMG1375**

INDUSTRIAL RANGE

Powered by MITSUBISHI

## Generating Sets Standard Features

Three phase four wire, output voltage 400V/230V, 50HZ, between 0.8 lagging, protection capability according with the standard of NAME1 and IP23.

### General Features:

- Δ Composed of MITSUBISHI diesel engine and Stamford or Leroy somer alternator
- Δ Oil and fuel filter fitted, water separator
- Δ Lube-oil drain valve fitted
- Δ Electric Starter Charge motor 24 V.D.C
- Δ Water-cooled
- Δ 8-hours operation base tank
- Δ Auto start
- Δ Optional soundproof and weatherproof canopy
- Δ 3 pole MCCB Delixi breaker
- Δ Operation & Maintenance manual
- Δ Special Integrated Steel Base tank and sprayed overall in gloss enamel paint

### Voltage Regulation:

- Voltage regulation maintained within  $\pm 0.5\%$
- Between 0.8 and 1.0 lagging and unity
- From no load to full load
- At speed droop variation upto 4.5%

### Frequency Adjustable Ratio:

- Change load from 0-100%, within 1.0% ( electric speed regulator), within 4.5% ( mechanical speed regulator)

### Frequency Undulation:

- load from 0-100%, frequency undulation within 0.25%
- No load wire volts max undulation ration\ within 1.8%
- Three Phrase balanced load in the order of 5%
- Effect factor of Telecom
- TIF better than 50
- THF to IEC60034 Part 40 better than 2%

## Diesel Generating Sets



Model: **ETMG1375**

INDUSTRIAL RANGE

Powered by MITSUBISHI

## Soundproofed Version Features

### Robust Corrosion Resistant Construction

- Δ Black finish stainless steel lock and hinges
- Δ Body made from steel components treated with polyester powder coating

### Excellent Access for Maintenance

- Δ Two large doors on each side
- Δ Radiator fill access plate
- Δ Lube oil and cooling water drains pipes to exterior of the enclosure

### Security and Safety

- Δ Control panel viewing window in a lockable access door
- Δ Emergency stop push button (red) mounted on enclosure interior
- Δ Cooling fan and battery charging alternator fully guarded
- Δ Exhaust silencing system totally enclosed for operator safety



## Diesel Generating Sets



Model: **ETMG1375**

INDUSTRIAL RANGE

Powered by MITSUBISHI

## Generating Sets other Features

### Generating Sets Optional Features

- ΔLow fuel level alarm shutdown
- ΔAutomatic Fuel Filling System
- ΔEngine oil feeding and drain pump
- ΔAuto Transfer Switch( ATS)
- ΔParallel control panels
- ΔCircuit Breaker MCCB & ACB
- ΔRemote Control Panel
- Δweatherproof/soundproof Canopy
- ΔTrailer type Gensets

### Quality Standards

ISO9001:2000,ISO14000,ISO3046  
ISO8528 BS4999  
BS5514,AS1359,ICE34  
CE Compliance

### Gensets Dimensions & Weight

Open type:LxWxH (mm) Net Weight Kgs

4600X2100X2450, 9370KGS

Silent type:LxWxH (mm) Net Weight Kgs

40 FT CONTAINER

**Authorized**