


# Etone Power Co., Ltd.

http://www.etonepower.com

# Model : ETCFJ250 Generating set Technical Data Sheet

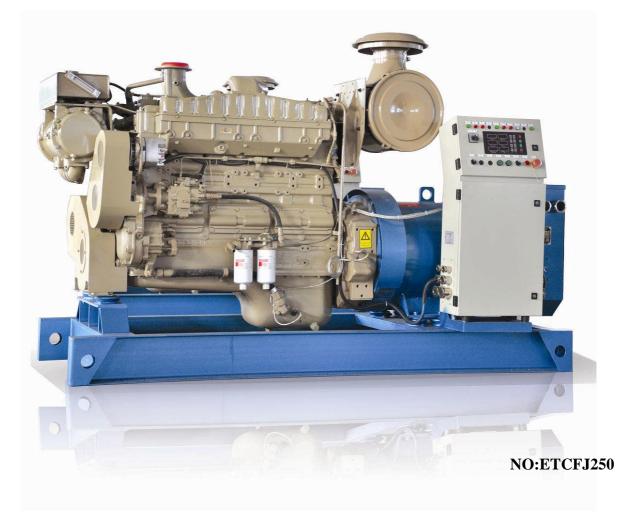

© 2012 copy right at Etone Power Co.,Ltd.

CE

ISO9001:2008

\

## **STANDARD SPECIFICATION**

#### **General features:**

- Coupled with Cummins diesel engine and Marathon alternator
- 24V DC start motor
- Brushless, Self-excited, IP23, insulation class H alternator



#### **Genset Main Technical Data**


3-PH, 50Hz@1500RPM, 400/230V (Also Can Be Made According To Customers' Special Requirements)


Voltage	HZ	Phase	P.F (COS⊄)	Output (KW)
400/230V	50	3	0.8	250

#### Criterion

- GB/T13032-1991
- ISO9001:2008 Quality Control System
- CCS approved

## **Dimension and Weight**





#### **Open Type**

Overall size (L\*W\*H) 2620×980×2290 Weight:3180kg

#### **ENGINE SPECIFICATION**

#### **Cummins Diesel Engine**

#### **Technical Data**

Engine Model	NTA855-DM
Number of Cylinders	6 cylinders in line
Cycle	4 stroke
Aspiration	Turbocharged and aftercooled

#### Powered by Cummins Engine

## NTA855-DM Generating Set

Bore×Stroke	140x 152 mm
Displacement	14.0L
Compression ratio	14.5:1
Prime Power/Speed	284KW/1500rpm
Speed Governor	electrical
Cooling System	By heat exchanger
Fuel Consumption at 100% Load	205 g/kw.h
Starter Motor	DC24V,

## **Alternator SPECIFICATION**

#### Marathon Alternator (Standard)

**Technical Data** 

Alternator Model	MP-H-250-4
Prime power	250KW
Frequency/speed	50HZ/1500rpm
Exciter type	Brushless, Self-excited
Power factor	0.8
Insulation Grade	н
Protection Grade	IP23
Phase / wire	3 phase 4 wires

## **Control System**

Model	KCMIIG
<ul> <li>* engine start/stop</li> <li>* engine coolant temperature</li> <li>* oil pressure and temperature</li> <li>* tachometer</li> <li>* coolant temperature alarm</li> <li>* oil pressure alarm</li> <li>* oil pressure alarm</li> <li>* battery charging indicator</li> <li>* generator to be protection from overload and overheat</li> </ul>	

#### Powered by Cummins Engine

## NTA855-DM Generating Set

## **Supply documents**

a.	Alternator	
	operation and maintenance manual	1PC
	CCS certificate	1PC
b.	Engine	
	operation and maintenance manual	1PC
	CCS certificate	1PC
	EIAPPcertificate	1PC
C.	Generator	
	CCS certificate	1PC
	Overall drawings of the set	1PC
	ELECTRINIC SYSTEM DRAWING	1PC
	Bench test	1PC
	Packing list	1PC
d.	Control panel	
	CCS certificate	1PC
	operation and maintenance manual	1PC

## **Picture of packing**



#### Etone Power Co.,Ltd.